



DEWALT



LENOX



STANLEY



CORDLESS TOOLS — FORCIBLE ENTRY & UTILITY BARS — LIGHTING
FIRE & RESCUE RECIPROCATING SAW BLADES — PORTABLE POWER

STANLEY®

FIRE & RESCUE



55-122 30" Fubar® Forcible Entry Tool

- Forcible entry tool designed by responders for vehicle extrication and extreme demolition
- Board jaw sized specifically for grabbing common dimensional lumber
- Beveled nail slot for pulling and prying nails
- Heat treated and tempered striking face helps prevent chipping
- Carabiner holes for easy attachment of shoulder strap
- Hi-visibility 3M™ Scotchlite™ enhances visibility



55-121 18" Fubar® Forcible Entry Tool



STHT55134 14-1/4" Fubar® Demolition Bar



DeWALT®

POWER TOOLS NO GAS, NO CORDS, NO GENERATORS

DCS690 60V MAX* 9" Cut-Off Saw Powered by DeWALT FLEXVOLT®

- The brushless motor provides up to 6,600 RPM, allowing the user to make fast and efficient single pass cuts and scores in concrete, pavers, steel, and rebar.
- Cuts up to 96 pieces of #5 rebar per charge¹
¹(Cut in 4 piece rebar bundles using a DCB609 battery)
- Cuts up to 22 cinderblocks in half per charge²
²(Using a DCB609 battery in standard cored concrete block)
- The Heavy Load Indicator light provides the user with real time power and runtime feedback during demanding applications.
- The Rotatable, 5-Position Guard allows the user to select the approach angle, which provides optimal visibility and accessibility when cutting in tight spaces.
- The Dual-Sided Water Delivery System offers an OSHA Table 1 Complaint solution for dust management when cutting concrete and masonry materials.
- The latched and sealed battery box keeps the battery and terminals protected from harsh jobsite conditions.
- This tool comes Tag Ready™ so users and companies can attach the DeWALT Tag™ and track its location virtually anywhere via the DeWALT Tool Connect™ app.
- The beltless All-Metal Drivetrain provides jobsite durability and efficiency. No belts to change, tension, and maintenance.
- The front handle that can be held in three positions, allowing the saw to be securely held to cut in both horizontal and vertical positions.



DWAFV8918 9" Ceramic Metal Cut-Off Wheel Type 1



DWAFV8900 9" Diamond Cutting Wheel



POWER TOOLS

NO GAS, NO CORDS, NO GENERATORS

DEWALT

DCS389 60V MAX* Brushless Reciprocating Saw Powered by DeWALT FLEXVOLT®

- Fast and efficient cutting with up to 3,000 SPM and a 1-1/8" stroke length.
- Illuminate dark work areas with the integrated LED
- More points of contact with pivoting shoe
- Variable Speed Trigger for speed control



RECIPROCATING SAW BLADES

LENOX

WHEN PERFORMANCE MATTERS, TRUST LENOX

GENERAL PURPOSE

10 TPI 9" x 1" x .062" Demolition Reciprocating Saw Blade

20372960R5 (5 Pack)

20524B960R (25 Pack)

22762OSB960R (50 Pack)



³vs. prior generation LENOX straight blades

GOLD® POWER ARC™ METAL CUTTING

10 TPI 9" x 1" x .062" Gold® POWER ARC™ Curved Demolition Reciprocating Saw Blade

21089960GR (5 Pack)

21221B960GR (25 Pack)



⁴vs. LENOX straight bi-metal reciprocating saw blades.

LAZER CT™ CARBIDE TIPPED

HIGH PERFORMANCE IN METAL CUTTING

8 TPI LAZER CT™ Carbide Tipped Reciprocating Saw Blades

6" x 1" x .052" 2014223 (5 Pack)

9" x 1" x .052" 2014225 (5 Pack) **UP TO 50X LIFE⁵**



⁵vs. 10TPI Standard LENOX Bi-Metal reciprocating saw blades cutting cast iron and rebar.

DEMOLITION CT™ CARBIDE TIPPED

HIGH PERFORMANCE IN WOOD CUTTING

6 TPI DEMOLITION CT™ Carbide Tipped Reciprocating Saw Blades


6" x 1" x .05" 1832162 (5 Pack)

9" x 1" x .05" 1832144 (5 Pack)

12" x 1" x .05" 1832147 (5 Pack) **UP TO 50X LIFE⁶**



⁶vs. 6TPI standard LENOX Bi-Metal reciprocating saw blades cutting wood with nails.

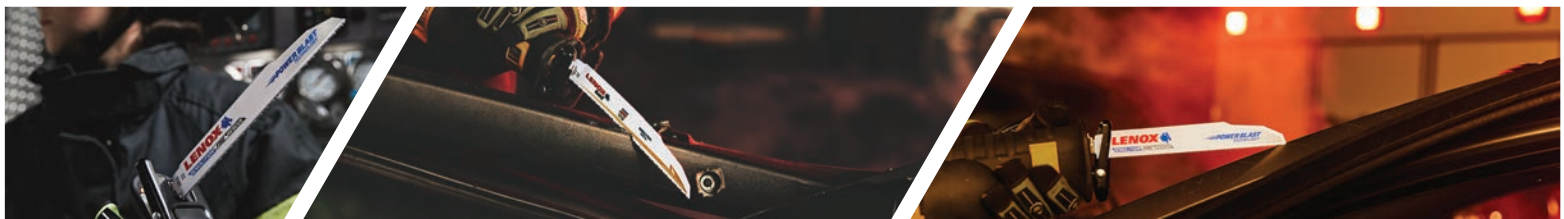



POWER TOOLS

NO GAS, NO CORDS, NO GENERATORS

DCG418 60V MAX* Brushless 4-1/2" / 6" Grinder Powered by DeWALT FLEXVOLT®



- Up to 30% more power vs the DCG414*
- 13.0 Amp motor equivalent power
- 9000 rpm no-load speed for applications with 6" grinder wheels
- Brake engages when the trigger is released with stopping speeds of 1.5 seconds with standard grinding wheel (4-1/2" x 1/4" Bonded abrasive wheel, non-hubbed)
- Kickback Brake engages when a pinch, stall, or bind-up event is sensed. The electronic brake engages with maximum force to quickly stop the wheel, reduce the movement of the grinder, and shut the grinder off
- E-Clutch® System activates in less than a tenth of a second when a pinch/stall is detected, shutting down the motor



DCCS670 60V MAX* Brushless 16" Chainsaw Powered by DeWALT FLEXVOLT®



- Up to 70 cuts per charge on a 6" x 6" pressure-treated wood using DCB609 Battery
- Tool-Free chain tensioning for quick and smooth adjustments
- Combination tooled/tool less bar retention knob for proper bar clamping force
- Chain brake for kick back protection
- Auto-oiling for continuous lubrication.
- Quarter-turn cap for quick oil refills
- High-efficiency brushless motor maximizing run time and motor life



The DeWalt DCG418 with a DCB609 60V MAX DeWALT FLEXVOLT® battery has up to 30% more power vs. DeWalt DCG414 with a DCB606 60V MAX* battery

POWER TOOLS

NO GAS, NO CORDS, NO GENERATORS

DeWALT

DCN21PL
20V MAX* XR® Brushless 21° Plastic Collated
Cordless Framing Nailer



NO COMPRESSOR

NO AIR HOSES

DCN692
20V MAX* XR® Brushless
Dual Speed Framing Nailer



NO COMPRESSOR

NO AIR HOSES

CONCRETE DEMOLITION

DCH733
60V MAX* Brushless 1-7/8"
SDS MAX Rotary Hammer
Powered by DeWALT FLEXVOLT®



DWA5851
16" High Impact Bull
Point Steel Chisel



DWA5854
16" High Impact
Scaling Chisel



DWA5853
16" High Impact
Cold Chisel



DCS577
60V MAX* Brushless 7-1/4" Cordless Worm Drive Style
Saw Powered by DeWALT FLEXVOLT®



DCD991
20V MAX* XR® Brushless
3-Speed Drill/Driver



DCS494
20V MAX* 14 Gauge Swivel Head Double Cut Shears



DCS578
60V MAX* Brushless 7-1/4" Circular Saw with Brake
Powered by DeWALT FLEXVOLT®



DCF899H
20V MAX* XR® High Torque
1/2" Impact Wrench with
Hog Ring Anvil



D28605
5/16" Variable Speed Fiber Cement Siding Shear



CORDED

DCBL772
60V MAX* Brushless Handheld Axial Blower Powered by DeWALT FLEXVOLT®



DCL043

20V MAX* Jobsite LED Spotlight

- 3 bright LEDs illuminate
- 1 bright Red LED to preserve night vision
- 2 brightness settings provide flexibility for maximum light output or extended run-time
- 90-degree pivoting head
- Pivoting head allows for hands-free operation and light to be projected in multiple directions while standing on its base
- Belt hook to provide increased versatility for transportation and a hands-free use in multiple placements
- Integral hook for hands-free use in multiple placements
- Over-molded lens cover provides increased durability

BRIGHTNESS	1,000 & 90 LUMENS
BULB TYPE	LED
TOOL WEIGHT	1.42 lb WITHOUT BATTERY



DCL074

20V MAX* LED Worklight with Tool Connect™

- LED provides natural white light
- Set up with freestanding, tripod-mounted (sold separately), or hanging via hook
- Durable impact-resistant design
- IP54 rating for weather and dust resistance

BRIGHTNESS	5,000 LUMENS
BULB TYPE	LED
TOOL HEIGHT	12"
TOOL WEIGHT	8.6 lb WITHOUT BATTERY



DCL079

20V MAX* Cordless Tripod Light

- Natural white LED provides accurate color visibility, long life span, and stays cool to the touch
- Three brightness settings to customize work space illumination
- Telescoping pole extends light head to 7 feet to reduce shadows and glare
- Latch mechanism on handle to easily extend and collapse legs
- Tough shroud protects light head
- IP55 rating for weather and dust resistance

BRIGHTNESS	UP TO 3,000 LUMENS
RUN-TIME	UP TO 11 HOURS ⁸
BULB TYPE	LED
TOOL HEIGHT	UP TO 7 FEET
TOOL WEIGHT	16 lb WITHOUT BATTERY

⁸using DCB206 battery on low



PORTABLE POWER

BATTERIES, CHARGERS & ELECTRIC GENERATOR



DCB606
DeWALT FLEXVOLT® 20V MAX*/60V MAX*
Battery Pack (6.0 Ah)



DCB609
DeWALT FLEXVOLT® 20V MAX*/60V MAX*
Battery Pack (9.0 Ah)



DCB612
DeWALT FLEXVOLT® 20V MAX*/60V MAX*
Battery Pack (12.0 Ah)



DCB206
20V MAX* Premium XR® Lithium Ion Battery Pack (6.0 Ah)



DCB208
20V MAX* Premium XR® Lithium Ion Battery Pack (8.0 Ah)



DCB104
Multiport Simultaneous Fast Charger

- Simultaneous Charger: All Ports Charge At The Same Time
- Charges 12V MAX*, 20V MAX*, and DeWALT FLEXVOLT® 20V MAX*/60V MAX* Batteries
- 8.0 Amps Output Per Port (simultaneously)
- Charges (4) DCB204 battery in 40 mins
- Charges (4) DCB606 battery in 60 mins
- Thru-Hole Wall Mounts and Cord Wraps
- Side Brackets To Mount Onto The ToughSystem® Rails



DCB1800
1800 Watt Portable Power Station™ and Simultaneous Battery Charger

NO GAS TO RUN **NO EMISSIONS** **NO NOISE**

CHARGING TIME	2 HOURS (4.0 Ah Batteries)	
DIMENSIONS	Height	10.75"
	Width	21.3"
	Length	12.75"
OUTPUT	1800 WATTS (3600 Peak) 15.0 Amps	
OPERATING TEMP	32° – 104° F	
TOOL WEIGHT	18 lb WITHOUT BATTERIES	

Batteries and cord sold separately

Charges 4 Batteries Simultaneously
(Batteries and cord sold separately)

Multiport Parallel Charger
when plugged into an Outlet



ToughSystem® Compatible



1800 Watts Continuous 15 Amps
(3600 Peak) from (4) Batteries
Requires 4 batteries to operate

DEWALT®

LENOX® 

STANLEY®

Maximum initial battery voltage (measured without a workload) is 12, 20, and 60 volts. Nominal voltage is 10.8, 18, and 54. All amp hours (Ah) shown with 60V MAX products are measured in 20V MAX* mode.

Copyright © 2020 Stanley Black & Decker, Inc. The following are trademarks for one or more DeWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

GDS/20-1564842 ICWLXSTFRBR